



Non-Linear Load Isolation[®] Transformers

Section

4



Special winding techniques minimize eddy current losses. A double sized neutral handles excessive neutral currents. UL Listed for “K” Factor Loads 4, 13 & 20.

General Description and Features	50-51
Definition of Terms	52-53
Selection Charts	54-55

Non-linear loads generate high levels of harmonic currents. When supplying power to these loads, a special transformer design is necessary.

Typical non-linear loads include desktop computers, AC variable speed drives, HID lighting, electronic ballasts, inverters and welders. Of these non-linear loads, the major source of harmonic currents is the switch mode power supply found in desktop computers, data processors and other office equipment.

Acme non-linear load isolation transformers use special winding techniques to minimize eddy current losses generated by harmonic currents. A double-sized neutral conductor handles the excessive neutral current found in non-linear load applications.

The amount of harmonics produced by a given load is represented by the term “K” factor. The larger the “K” factor, the more harmonics are present. Linear loads have a “K” factor of 1; switch mode power supplies typically have a “K” factor as high as 20.

Acme non-linear load isolation transformers are shielded for cleaner power and carry the Acme exclusive 10-year limited warranty.

Features


- Available in K-factors of 4, 13 and 20. Consult factory for other K-factors.
- 3R Compliant
- All new units ship with weather shields already installed Flexibility. When a weather shield is not needed, it can easily be removed Terminal Lugs.
- Primary and secondary terminals come standard with lugs (up to 112.5kVA) for quicker, easier connections.
- 150°C and 115°C temperature rise units. 80°C temperature rise consult factory.
- 10-year limited warranty.
- UL Listed and CSA Certified.
- Available in 480V and 208V primary, 15 through 225 kVA.
- Primary taps: (2) 2 1/2% ANFC, (4) 2 1/2% BNFC.
- Aluminum windings

The following guide will help you select the proper transformer when the K-factor is unknown.*

K-Factor/Type of Load	
K1	Resistance heating, Incandescent lighting, Motors, Transformers, control/distribution
K4	Welders, Induction heaters, HID lighting, Fluorescent lighting, Solid state controls
K-13	Telecommunications equipment, Branch Circuits in classrooms and health care facilities
K-20	Main frame computers, Variable speed drives, Branch circuits with exclusive loads of Data Processing equipment, Desktop computers

* These ratings are to be used as a guide only. They may vary from one load equipment manufacturer to another. A Spectrum Analysis is the best source.

Note: Non-sinusoidal and non-linear are synonymous terms relating to the same transformer type.

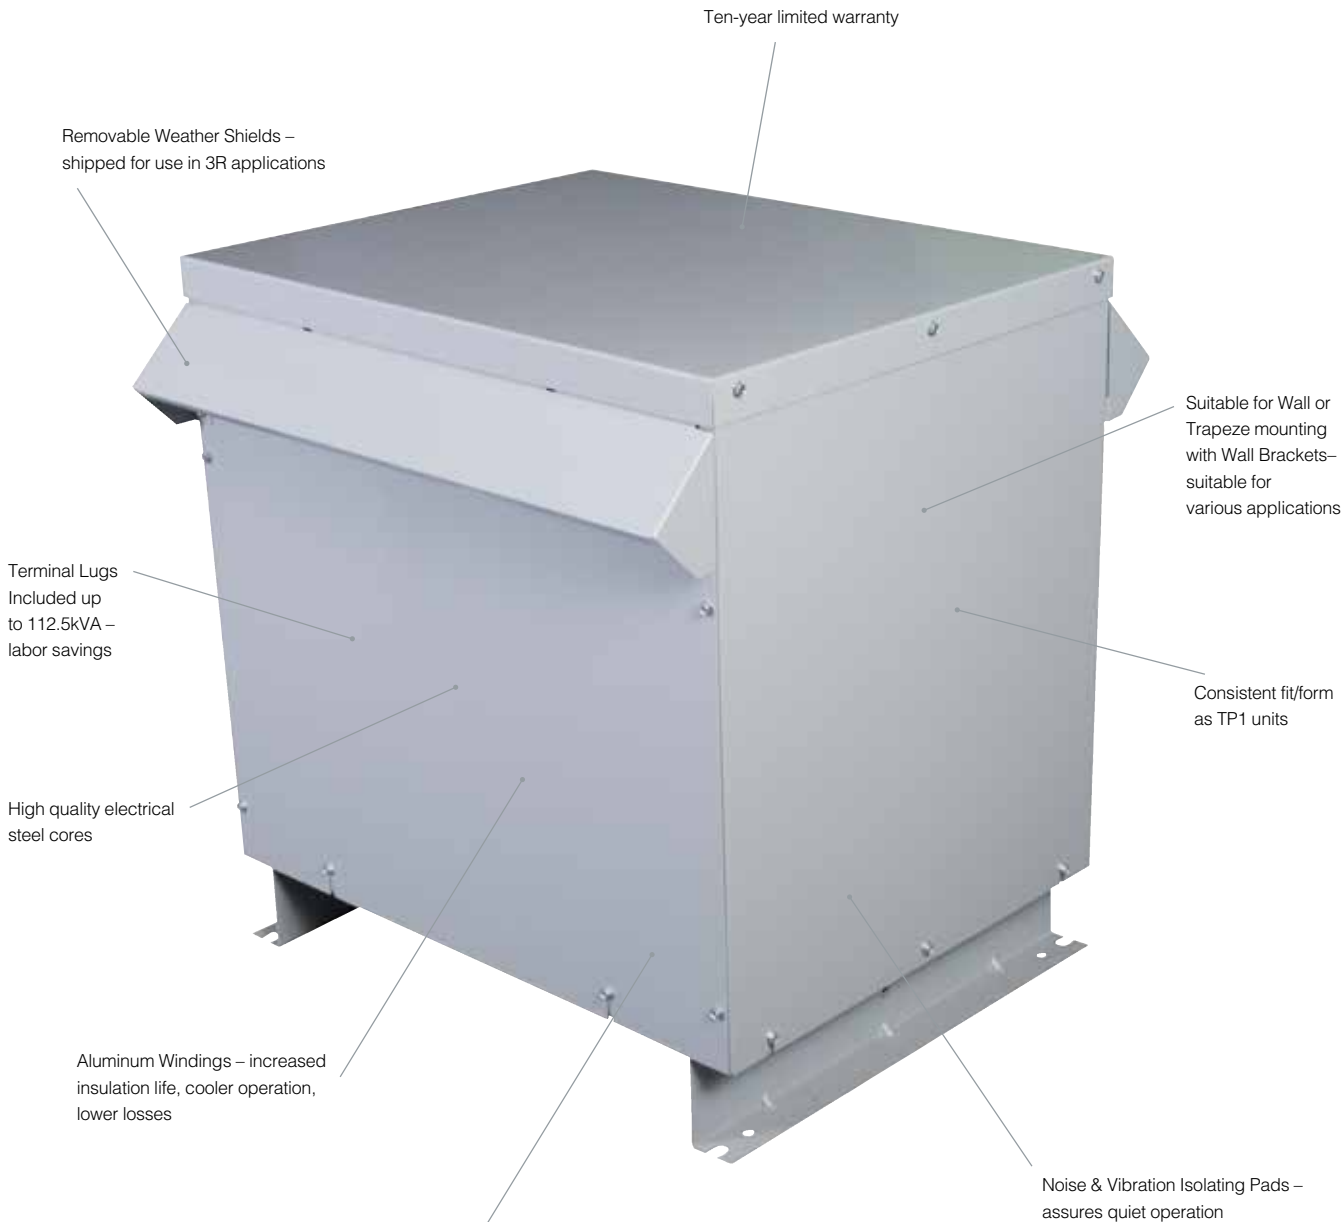

Double-sized neutral conductor handles excessive neutral currents

1. Linear loads

Loads where the current waveform conforms to the waveform of the applied voltage. Or loads where a change in current is directly proportional to a change in applied voltage. For example:

- Resistance heating
- Incandescent lighting
- Water heater

2. Non-linear loads

Loads where the current waveform does not conform to the waveform of the applied voltage. Or loads where a change in current is not proportional to a change in applied voltage. Examples are:

- Computer power supplies
- Motor drives
- Fluorescent lighting

Non-linear loads produce non-sinusoidal current or voltage waveforms.

3. Sinusoidal current or voltage

This term refers to a periodic waveform that can be expressed as the sine of a linear function of time.

4. Non-linear currents or voltages

A waveform of current or voltage which cannot be expressed as the sine of a linear function of time. A non-linear load would result in a non-sinusoidal current or voltage.

5. Harmonic

A sinusoidal waveform with a frequency that is an integral multiple of the fundamental 60 Hz frequency.

- 60 Hz Fundamental
- 120 Hz 2nd Harmonic
- 180 Hz 3rd Harmonic
- 240 Hz 4th Harmonic
- etc.

Current waveforms from non-linear loads appear distorted because the non-linear waveform is the result of adding harmonic components to the fundamental current.

6. Triplen harmonics

Odd multiples of the 3rd harmonic (3rd, 9th, 15th, 21st, etc.).

7. Harmonic distortion

Non-linear distortion of a system characterized by the appearance in the output of harmonic currents (voltages) when the input is sinusoidal.

8. Voltage harmonic distortion (VHD)

Voltage harmonic distortion is distortion caused by harmonic currents flowing through the system impedance. The utility power system has relatively low system impedance, and the VHD is very low. But, VHD on the distribution power system can be significant due to its relatively high system impedance.

9. Total harmonic distortion (THD)

The square root of the sum of the squares of all harmonic currents present in the load excluding the 60 Hz fundamental. It is usually expressed as a percent of the fundamental.

10. Root mean squared current (or voltage) RMS

- 1: The vector sum of the fundamental current and the total harmonic distortion.
- 2: Square root of the sum of the squared value of the fundamental current and the squared value of the total harmonic distortion.

11. Eddy currents

Currents flowing in a conducting material in the presence of a time varying magnetic field. These currents are in addition to the current drawn by the load.

12. Eddy current losses

Power dissipated due to eddy currents. Includes eddy current losses in the core, windings, case and associated hardware of a transformer.

13. Stray losses

A term used to express the difference between the measured alternating current losses on a transformer and the direct current (DC) losses (I^2R). Stray losses include eddy losses. Stray losses are usually expressed as a percent of the direct current (DC) losses.

14. Per unit value

- 1: Percent value divided by 100.
- 2: The ratio of two components of a system.

15. Harmonic spectrum “K” factor

The sum of the product of each harmonic current squared and that harmonic number squared for all harmonics from the fundamental (60 Hz) to the highest harmonic of any measurable consequence. When the “K” factor is multiplied by the stray losses of the transformer, the answer represents the losses in the transformer caused by harmonic currents. When these losses are added to the I^2R losses of the transformer, the total load losses are known. The “K” factor for a linear load without harmonics is one (1).





K FACTOR 13, 150°C RISE
208 DELTA PRIMARY VOLTS — 208Y/120 SECONDARY VOLTS — 3Ø, 60 Hz

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Wiring Diagrams	Design Figures
15	T3015K0064BK13S	25.50 (64.8)	24.40 (62.0)	19.37 (49.2)	366 (166.0)	F①	61	E
30	T3030K0064BK13S	25.50 (64.8)	24.90 (62.0)	19.37 (49.2)	522 (236.8)	F①	61	E
45	T3045K0064BK13S	29.40 (74.7)	28.15 (71.5)	22.37 (56.8)	667 (302.6)	F①	61	E
75	T3075K0064BK13S	35.40 (89.9)	31.90 (81.0)	26.87 (68.3)	938 (425.5)	F	61	E
112	T3112K0064BK13S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1213 (550.2)	F	61	E
150	T3150K0064BK13S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1700 (771.0)	F	61	E
225	T3225K0064BK13S	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	2165 (982.0)	F	61	E

Notes: All models are DOE 2016 compliant

① Wall mounting brackets are available for these sizes, refer to page 217.

K FACTOR 20, 150°C RISE
480 DELTA PRIMARY VOLTS — 208Y/120 SECONDARY VOLTS — 3Ø, 60 Hz

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Wiring Diagrams	Design Figures
15.0	T3015K0013BK20S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	366 (166.0)	F ①	22	E
30.0	T3030K0013BK20S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	500 (226.8)	F ①	22	E
45.0	T3045K0013BK20S	29.40 (74.7)	28.15 (71.5)	22.37 (56.8)	600 (272.0)	F	22	E
75.0	T3075K0013BK20S	35.90 (91.2)	31.90 (81.0)	26.88 (68.3)	938 (425.5)	F	22	E
112.5	T3112K0013BK20S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1213 (550.2)	F	22	E
150.0	T3150K0013BK20S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1600 (725.8)	F	22	E
225.0	T3225K0013BK20S	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	1938 (879.0)	F	22	E

Notes: All models are DOE 2016 compliant

① Wall mounting brackets are available for these sizes, refer to page 217.

K FACTOR 13, 150°C RISE
480 DELTA PRIMARY VOLTS — 208Y/120 SECONDARY VOLTS — 3Ø, 60 Hz

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Wiring Diagrams	Design Figures
15.0	T3015K0013BK13S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	366 (166.0)	F①	22	E
30.0	T3030K0013BK13S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	500 (226.8)	F①	22	E
45.0	T3045K0013BK13S	29.90 (75.9)	28.15 (71.5)	22.37 (56.8)	600 (272.0)	F①	22	E
75.0	T3075K0013BK13S	35.90 (91.2)	31.90 (81.0)	26.88 (68.3)	938 (425.5)	F	22	E
112.5	T3112K0013BK13S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1213 (550.2)	F	22	E
150.0	T3150K0013BK13S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1600 (725.8)	F	22	E
225.0	T3225K0013BK13S	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	1938 (879.0)	F	22	E

Notes: All models are DOE 2016 compliant

① Wall mounting brackets are available for these sizes, refer to refer to page 217.



**K FACTOR 4, 150°C RISE
480 DELTA PRIMARY VOLTS — 208Y/120 SECONDARY VOLTS — 3Ø, 60 Hz**

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Wiring Diagrams	Design Figures
15.0	T3015K0013BK4S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	325 (147.0)	F①	22	E
30.0	T3030K0013BK4S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	366 (166.0)	F①	22	E
45.0	T3045K0013BK4S	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	500 (226.8)	F①	22	E
75.0	T3075K0013BK4S	29.40 (74.7)	28.15 (71.5)	22.37 (56.8)	600 (272.0)	F	22	E
112.5	T3112K0013BK4S	35.40 (89.9)	31.90 (81.0)	26.87 (68.3)	938 (425.5)	F	22	E
150.0	T3150K0013BK4S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1213 (550.2)	F	22	E
225.0	T3225K0013BK4S	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1600 (725.8)	F	22	E

Notes: All models are DOE 2016 compliant

① Wall mounting brackets are available for these sizes, refer to refer to page 217.

**K FACTOR 13, 115°C RISE
480 DELTA PRIMARY VOLTS — 208Y/120 SECONDARY VOLTS — 3Ø, 60 Hz**

kVA	Catalog Number	Height (Inches)(Cm.)	Width (Inches)(Cm.)	Depth (Inches)(Cm.)	Weight (Lbs.)(Kg.)	Mounting Type (Wall)(Floor)	Wiring Diagrams	Design Figures
15	T3015K0013BK13SF	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	366 (166.0)	F①	22	E
30	T3030K0013BK13SF	25.50 (64.8)	24.40 (62.0)	19.40 (49.3)	500 (226.8)	F	22	E
45	T3045K0013BK13SF	29.40 (74.7)	28.15 (71.5)	22.37 (56.8)	600 (272.0)	F	22	E
75	T3075K0013BK13SF	35.40 (89.9)	31.90 (81.0)	26.87 (68.3)	938 (425.5)	F	22	E
112	T3112K0013BK13SF	41.52 (105.4)	32.90 (83.6)	29.88 (75.9)	1213 (550.2)	F	22	E
150	T3150K0013BK13SF	41.52 (105.5)	32.90 (83.6)	29.88 (75.9)	1600 (725.8)	F	22	E
225	T3225K0013BK13SF	45.60 (115.8)	39.50 (100.3)	35.50 (90.2)	1938 (879.0)	F	22	E

Notes: All models are DOE 2016 compliant

① Wall mounting brackets are available for these sizes, refer to page 217.

For Additional Low Temperature Rise 115° and 80° Degree Units and Copper Wound Units, Consult Factory
 Non-Linear Load Isolation® Wiring Diagrams (refer to page 209)
 Non-Linear Load Isolation® Design Figures (refer to page 208)

